


RS 232 / 485

Interface

1. Product

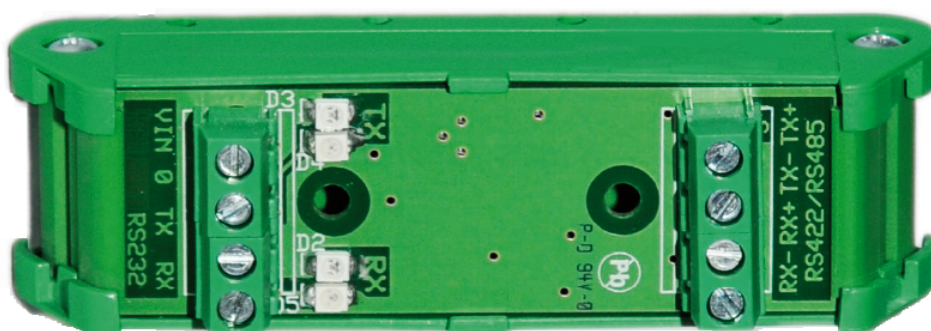

2. Technical features

Power supply	5 - 24Vdc
Power consumption	0.5 W
Operating temperature	-10°C / +50°C (max humidity 85% non-condensing)
Storage temperature	-20°C / +60°C
Overall dimensions	30 mm x 90 mm x 50 mm (l x h x p)
Mounting	Support for DIN outlined or OMEGA bar

Support material:	Polyamide 6.6 UL 94V-0
Connections	Terminal blocks, pitch 5.08 mm
Serial Port 1	Rs232
Serial Port 2	Rs422-Rs485
Selection reception/transmission	Automatic (RS485 half duplex) Fixed (RS422 full duplex)
Compliance with regulations	EN61000-6-2, EN61000-6-3, EN61010-1

3. Connections

